


# NOMASTYL® Mouldings

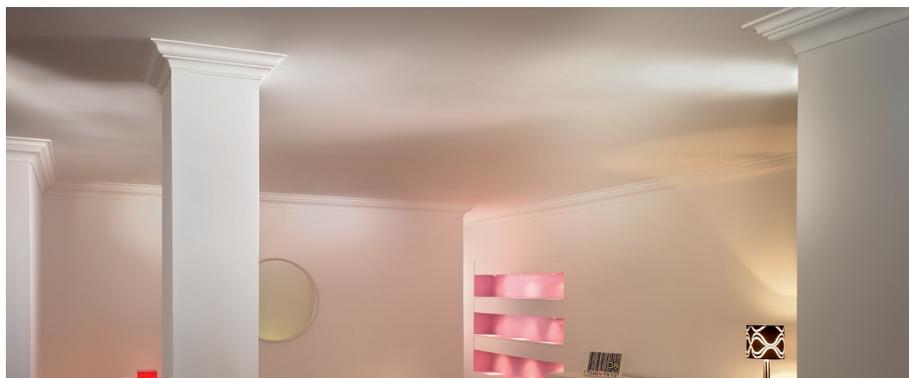

## 1. MATERIAL

**Product name:**  
NOMASTYL® Mouldings

**Constituent material:**  
Extruded polystyrene; fine and closed-cell, white, homogeneous foam.

**Density:**  
Approx. 60 kg/m<sup>3</sup>.

## 2. SPECIFIC PROPERTIES

**Visible surfaces:**  
Perfectly smooth surface with clean ends.

**Gluing surfaces:**  
Slanted surfaces (2°) for easier fitting, and grooved for better adhesion to the glue.

**Dimensions:**  
Length of a moulding: 2 m / 6.56 ft (tolerance  $\pm$  5 mm)



NMC sa reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC sa information service. Any partial reproduction or reprint shall require our explicit approval.

**NMC sa**  
Gert-Noël-Straße - B-4731 Eynatten - Belgium  
Tel.: +32 87 85 85 00  
Fax: +32 87 85 85 11  
E-Mail: info@nmc.eu

[www.nmc.eu](http://www.nmc.eu)



# NOMASTYL® Mouldings



## 3. USE

### Fitting and storage conditions:

For the best result, the product will be fitted and stored in conditions close to those of final use. Fitting on a wet backing surface (fresh plaster) and in forced drying conditions (heat gun, dehumidifier, exceptionally high temperature) are to be ruled out.

### Backing:

The following backing surfaces are suitable: indoor plastered or papered surfaces, coated plaster.

Surfaces must be clean, dry, free from dust, degreased and flat; rough down if necessary.

If the product is to be applied to particular backing surfaces, please consult our technical department.

### Tools:

NMC-PS saw and NMC-VARIO or VARIO PLUS mitre-box.

### Adhesive and joints:

Apply ADEFIX® adhesive liberally to the gluing surfaces with an applicator gun (cartridge) or spatula. Then place the decorative element onto the substrate and press. Wipe away surplus adhesive with a spatula or wet sponge (see installation instructions). Prop up if needed.

Width of joints: between the individual profiles approx. 2-3 mm.

Application temperature: +5°C to +35°C

Cleaning product (before hardening): water

### Surface work:

NOMASTYL® mouldings can be painted, without any problem, with solvent-free paints (e.g.: dispersion paints, acrylic lacquers, etc.). If, however, you wish to apply a solvent paint, it is advisable to apply a dispersion paint first of all, and then test it.

## 4. SPECIAL INSTRUCTIONS

### Regulations concerning dangerous substances:

NOMASTYL® polystyrene products are to be classified neither under "very toxic" nor under "toxic", according to the regulations concerning dangerous substances.

# NOMASTYL<sup>®</sup>

## Mouldings



### Important notes:

The elements are strictly decorative to the exclusion of any structural function; they are not designed to withstand loads and should be isolated by flexible joints from elements likely to convey strains or movements.